



CLASSIC TEXTURED

Make a statement with strong bold lines

The Tilcor Classic textured-finish tile features a defined angular profile that makes it one of the most popular products in the Tilcor range. Its sharp, clean lines and sloping edges create added depth and enhance the dimensions of your roofline. The Tilcor Classic is available in a wide selection of colours to suit any design and taste.

Extensive research and development in the design process ensures every Tilcor product is manufactured to the highest quality with exceptional durability and strength. The tile profiles and roofing accessories are engineered to interlock and overlap to resist wind lifting and keep out the harsh elements.

At less than 7kg/m², a Tilcor roof is a 'Lightweight Roofing System', so considerable cost savings can be achieved during construction. The perfect replacement for your old existing roof, a Tilcor roof lets you improve the look and value of your home in a matter of days.

All of Tilcor's roofing products are fabricated from zinc-aluminium protected steel. Tilcor's textured finish provides added protection by embedding natural stone granules in an acrylic base-coat. A final clear acrylic over-glaze is applied before being oven cured. This extremely durable UV-resistant coating enables Tilcor roofing products to withstand the harshest environments around the world.

Tilcor is ISO 9001 accredited. International test reports, appraisals and field results confirm our products are 100% waterproof, earthquake safe, fire resistant and able to withstand hurricane-force winds of up to 190kph. A Tilcor roof will not only safeguard your investment but will also give you complete peace of mind because it's backed by a Tilcor warranty.

You will not find a more durable, versatile and attractive roofing product on the world market that will surpass Tilcor's quality and affordability.

Minimum roof pitch: 12 degrees.



CLASSIC TEXTURED

Colour Options



Autumn



Brown Bark



Greenstone



Charcoal




Coffee Brown



Terracotta

Colours in this brochure are as close to the original as modern printing process will allow.

MATERIAL STRUCTURE

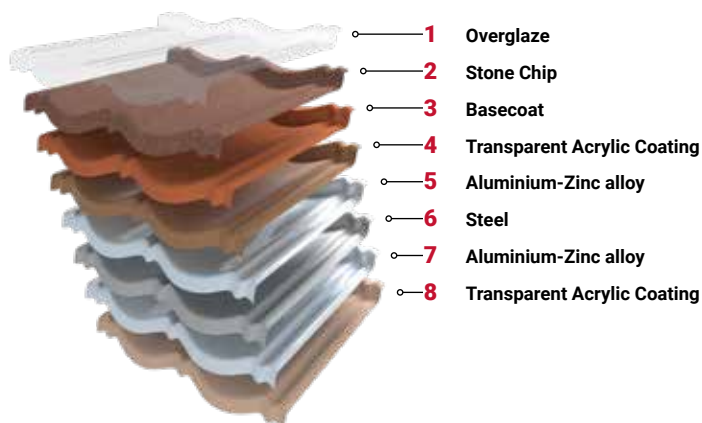

COATING SPECIFICATION

Overglaze: Clear 100% acrylic resin coating for granule binding and a semi-gloss finish. It helps enhance the appearance as well as increase the resistance to physical damage.

Stone Chip: Carefully selected granules provide excellent surface coverage and attractive natural lasting colours.

Basecoat: A tough opaque coating based on acrylic resin. It bonds the stone chips and protects the underlying layer from water and UV radiation. It has good UV resistance and retains its flexibility although it does become harder after the first few weeks.

Transparent coatings: Both sides of the Aluminium-Zinc alloy coated steel are coated with a transparent layer that provides protection and a uniform substrate for further coatings. This transparent coating allows identification of the Aluminium-Zinc substrate to be made by distributors and customers.

STEEL SPECIFICATION

The TILCOR CLASSIC tile is made of Aluminium-Zinc alloy coated steel. The grade of steel used is designed to allow forming without cracking or significant elastic recovery and at the same time to be rigid enough to tolerate reasonable loads without excessive deformation.

TEXTURED SURFACE

Stone chip granules are applied to provide an attractive textured finish which at the same time enhance resistance to UV radiation.

Overall Length	1320 mm
Length of Cover	1265 mm
Overall Width	415 mm
Width of Cover	369 mm
Minimum Pitch	12° (21%)
Up stand	26 mm
Down turn	24 mm
Roof Cover	0.467 m ²
Tiles per m ²	2.14
Weight/panel	2.90 kg
Weight/area	6.56 kg/m ²
Batten space	369 mm



IKO Metals Europe NV

P +32 0 12 24 18 01, E info.europe@ikometals.com, Michielenweg 3, 3700 Tongeren, Belgium. www.tilcor.eu